



Genette

GC60

Model GC60
Speed 1500 RPM
Phase/Voltage 3, 415
Frequency 50 Hz

Stdby Power 66kVA / 52.8 kW
Prime Output 60kVA / 48 kW
Noise Level (dBA @ 7m) 69 dB(A)
Fuel Capacity 226 Litres

Length 1.842m
Width 0.8m
Height 1.47m
Weight 919 kg

Engine

Manufacturer Cummins Diesel
Engine Model 4BTA3.9G2
Type & Cylinder 4 Stroke – 6 L
Induction Turbocharged After Cooled
Fuel Consumption
13.1L @ 100%, 9.8L @ 75%, 6.7L @ 50% Load
Coolant Capacity 8 L
Governor Electronic
Cubic Capacity 3.9 L
Oil Capacity 11 L

Options


Outlets Single or 3 Phase Options
PMG EBS option

Controls

Controller DeepSea 702 with Analog Metering
Circuit Breaker Four Pole
Emergency Stop Included

Alternator

Alternator Brand / Model Stamford / UCi224E
Type Brushless
Harmonic Distortion Less than 5%
Protection Class IP 23
Insulation Class Class H

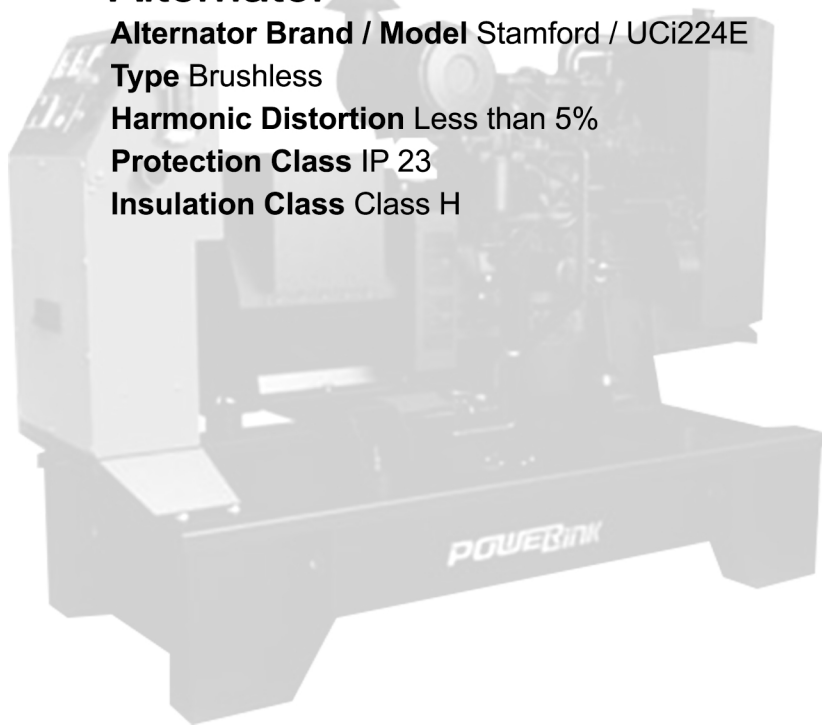

East Coast Head Office Ph. 1300 305 912
Ph. +61 7 3277 8626 Fax. +61 7 3277 8627
24 Perrin Place, Salisbury QLD 4107

West Coast Head Office Ph. 1300 305 912
Ph. +61 8 6305 0145 Fax. +61 8 6305 0219
2/6 Quantum Link, Wangara WA 6065

CALL US
1300 305 912