



Caterpillar is leading the power generation marketplace with Power Solutions engineered to deliver unmatched flexibility, expandability, reliability, and cost-effectiveness.

Specifications

Generator Set Specifications		
Height - Maximum	1906 mm	75 in
Length - Maximum	4135 mm	162.4 in
Width - Maximum	1989 mm	78.3 in
Minimum Rating	550 kVA	
Maximum Rating	715 kVA	
Voltage	208 to 600 Volts	
Frequency	50 Hz	
Speed	1500 or 1800 RPM	

Generator Set Configurations	
Emissions/Fuel Strategy	Low Fuel Consumption, U.S. EPA Certified for Stationary Emergency Use Only (Tier 2 Nonroad Equivalent Emission Standards), China Nonroad III Emission Standards

Engine Specifications	
Engine Model	C18 ATAAC, I-6, 4-Stroke Water-Cooled Diesel
Bore	145 mm (5.71 in)
Displacement	18.13 L (1106.36 in3)
Stroke	183 mm (7.2 in)
Compression Ratio	14.5:1
Aspiration	Air to Air Aftercooled
Governor Type	Adem™ A4
Fuel System	Electronic unit injection

Benefits and Features

Design Criteria

The generator set accepts 100% rated load in one step per NFPA 110 and meets ISO 8528-5 transient response.

Cat Diesel Engine

Reliable, rugged, durable design

Field-proven in thousands of applications worldwide

Four-stroke-cycle diesel engine combines consistent performance and excellent fuel economy with minimum weight

Generator

Matched to the performance and output characteristics of Cat engines

Industry leading mechanical and electrical design

Industry leading motor starting capabilities

High Efficiency

Cat EMCP Control Panel

The EMCP controller features the reliability and durability you have come to expect from your Cat equipment.

EMCP4 is a scalable control platform designed to ensure reliable generator set operation, providing extensive information about power output and engine operation. EMCP4 systems can be further customized to meet your needs through programming and expansion modules.

Single-Source Supplier

Fully prototype tested with certified torsional vibration analysis available

World Wide Product Support

Cat dealers provide extensive post-sale support including maintenance and repair agreements. Cat dealers have over 1,800 dealer branch stores operating in 200 countries. The Caterpillar S•O•SSM program cost effectively detects internal engine component condition, even the presence of unwanted fluids and combustion by-products

Seismic Certification

Seismic Certification available.

Anchoring details are site specific, and are dependent on many factors such as generator set size, weight, and concrete strength.

IBC Certification requires that the anchoring system used is reviewed and approved by a Professional Engineer Seismic Certification per Applicable Building Codes: IBC 2000, IBC 2003, IBC 2006, IBC 2009, CBC 2007, CBC 2010

Pre-approved by OSHPD and carries an OSP-0321-10 for use in healthcare projects in California

UL 2200 / CSA - Optional

UL 2200 listed packages

CSA Certified

Certain restrictions may apply.

Consult with your Cat® Dealer.

Standard Equipment

Air Inlet System

- Light duty air cleaner
- Aftercooler core
- Turbocharger

Control System

- EMCP 4.2

Cooling

- Radiator and cooling fan with guard
- Coolant drain line with valve
- Fan drive, battery charging alternator drive
- Caterpillar extended life coolant

Exhaust System

- Stainless steel exhaust flex gaskets, raincap and SAE exhaust flange for customer use; shipped loose

Fuel System

- Standard 8 hour open set fuel tank

Generator and Attachments

- Matched to the performance and output characteristics of Cat engines
- A frame generator - IP21 protection
- Integrated Voltage Regulator
- Integrated Voltage Regulator
- Power center, IP22
- Segregated low voltage (AC/DC) wiring panel
- Mandatory Option circuit breaker, IEC, 3 pole, mounted in power centre

Governing System

- Cat Electronic Governor (ADEM A4)

Lube System

- Lubricating oil
- Oil drain valves

Mounting System

- Captive linear vibration isolators between base and engine-generator. includes lifting provisions and termination points for coolant and lube oil drain lines

Starting/Charging

- 24 Volt battery with rack and cables

General

- Engine and alternator pre-paint, Caterpillar yellow

Optional Equipment

Air Inlet System

- Single element air cleaner
- Dual element air cleaner

Circuit Breakers

- 3 Pole (IEC-100% rated) circuit breakers - Package mounted
- 4 Pole (IEC-100% rated) circuit breakers - Package mounted

- 3 Pole (IEC-100% rated) circuit breakers - Motorised
- 4 Pole (IEC-100% rated) circuit breakers - Motorised
- Circuit breaker (IEC) auxiliary contacts
- Shunt trip for IEC breaker
- Pad-lockable circuit breaker device
- Power terminal strip

Control System

- EMCP 4.4
- Volt free contact
- Local alarm horn
- Oil temperature displays
- Protective devices: Earth fault relay - earth leakage ground fault relay - Overload shutdown via breaker - Low fuel level alarm - Low fuel level shutdown - high fuel level alarm - Fuel level sensor
- Local alarm modules
- Remote annunciator modules

Cooling System

- Radiator duct flange
- Low coolant temperature alarm

Enclosures

- Sound attenuated enclosures

Exhaust System

- Engine mounted muffler
- 10, 25 and 35 end in / end out Mufflers
- 8 and 10 inch GP flanges
- 8 and 10 inch elbow kits
- Manifold and Turbocharger guard

Fuel System

- Integral - Dual wall fuel tank base
- Manual fuel transfer pump
- Fuel transfer system

Generator and Attachments

- Ingress protection
- Permanent magnet excitation
- Space heaters
- A frame oversize generator
- A frame CIP generator
- LC frame generator
- LC frame oversize generators

- LC frame CIP generator


Lube System

- Manual sump pump

Starting and Charging

- 5 Amp battery charger
- Battery disconnect switch
- Jacket water heaters

Dimensional Art

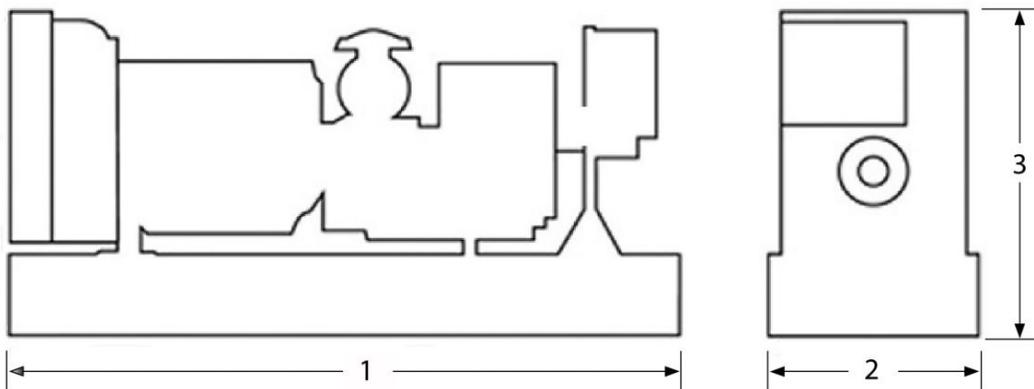

Dimensions	Dimension 1	Dimension 2	Dimension 3
Genset dimesnions	4135 mm (162.4 in)	1989 mm (78.3 in)	1906 mm (75.0 in)

The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, their respective logos, ADEM, EUI, S•O•S, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

C18

572 ekW/ 715 kVA/ 50 Hz/ 1500 rpm/ 415 V/ 0.8 Power Factor

Rating Type: STANDBY

Fuel Strategy: LOW FUEL CONSUMPTION



C18
572 ekW/ 715 kVA
50 Hz/ 1500 rpm/ 415 V

Image shown may not reflect actual configuration

Metric English

Package Performance		
Genset Power Rating with Fan @ 0.8 Power Factor	572 ekW	
Genset Power Rating	715 kVA	
Aftercooler (Separate Circuit)	N/A	N/A

Fuel Consumption		
100% Load with Fan	146.1 L/hr	38.6 gal/hr
75% Load with Fan	108.0 L/hr	28.5 gal/hr
50% Load with Fan	73.2 L/hr	19.3 gal/hr
25% Load with Fan	41.1 L/hr	10.9 gal/hr

Cooling System ¹		
Engine Coolant Capacity	20.8 L	5.5 gal

Inlet Air		
Combustion Air Inlet Flow Rate	37.8 m ³ /min	1334.7 cfm
Max. Allowable Combustion Air Inlet Temp	52 ° C	125 ° F

Exhaust System		
Exhaust Stack Gas Temperature	570.4 ° C	1058.8 ° F
Exhaust Gas Flow Rate	111.8 m ³ /min	3946.1 cfm
Exhaust System Backpressure (Maximum Allowable)	10.0 kPa	40.0 in. water



C18

572 ekW/ 715 kVA/ 50 Hz/ 1500 rpm/ 415 V/ 0.8 Power Factor

Rating Type: STANDBY

Fuel Strategy: LOW FUEL CONSUMPTION

Heat Rejection		
Heat Rejection to Jacket Water	181 kW	10278 Btu/min
Heat Rejection to Exhaust (Total)	548 kW	31158 Btu/min
Heat Rejection to Aftercooler	109 kW	6196 Btu/min
Heat Rejection to Atmosphere from Engine	90 kW	5120 Btu/min
Heat Rejection to Atmosphere from Generator	36 kW	2042 Btu/min

Alternator ²	
Motor Starting Capability @ 30% Voltage Dip	1581 skVA
Current	995 amps
Frame Size	LC7234H
Excitation	PM
Temperature Rise	163 ° C

Emissions (Nominal) ³		
NOx	2982.3 mg/Nm ³	6.1 g/hp-hr
CO	347.9 mg/Nm ³	0.7 g/hp-hr
HC	3.8 mg/Nm ³	0.0 g/hp-hr
PM	8.7 mg/Nm ³	0.0 g/hp-hr

DEFINITIONS AND CONDITIONS

1. For ambient and altitude capabilities consult your Cat dealer. Air flow restriction (system) is added to existing restriction from factory.
2. UL 2200 Listed packages may have oversized generators with a different temperature rise and motor starting characteristics. Generator temperature rise is based on a 40° C ambient per NEMA MG1-32.
3. Emissions data measurement procedures are consistent with those described in EPA CFR 40 Part 89, Subpart D & E and ISO8178-1 for measuring HC, CO, PM, NOx. Data shown is based on steady state operating conditions of 77° F, 28.42 in HG and number 2 diesel fuel with 35° API and LHV of 18,390 btu/lb. The nominal emissions data shown is subject to instrumentation, measurement, facility and engine to engine variations. Emissions data is based on 100% load and thus cannot be used to compare to EPA regulations which use values based on a weighted cycle.

C18

572 ekW/ 715 kVA/ 50 Hz/ 1500 rpm/ 415 V/ 0.8 Power Factor

Rating Type: STANDBY

Fuel Strategy: LOW FUEL CONSUMPTION

Applicable Codes and Standards:

AS1359, CSA C22.2 No100-04, UL142,UL489, UL869, UL2200,
NFPA37, NFPA70, NFPA99, NFPA110, IBC, IEC60034-1, ISO3046, ISO8528,
NEMA MG1-22,NEMA MG1-33, 2006/95/EC, 2006/42/EC, 2004/108/EC.

Note: Codes may not be available in all model configurations. Please consult your local Cat Dealer representative for availability.

STANDBY:Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

Ratings are based on SAE J1349 standard conditions. These ratings also apply at ISO3046 standard conditions

Fuel Rates are based on fuel oil of 35° API [16° C (60° F)] gravity having an LHV of 42 780 kJ/kg (18,390 Btu/lb) when used at 29° C (85° F) and weighing 838.9 g/liter (7.001 lbs/U.S. gal.). Additional ratings may be available for specific customer requirements, contact your Cat representative for details. For information regarding Low Sulfur fuel and Biodiesel capability, please consult your Cat dealer.

www.Cat-ElectricPower.com

Performance No.: EM1390-00

Feature Code: C18DEDR

Generator Arrangement: 5029745

Date: 01/26/2018

Source Country: U.K.

The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, their respective logos, ADEM, EUI, S•O•S, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.