


SPECIFICATION

Isuzu Power Solutions.
For those who never stop.

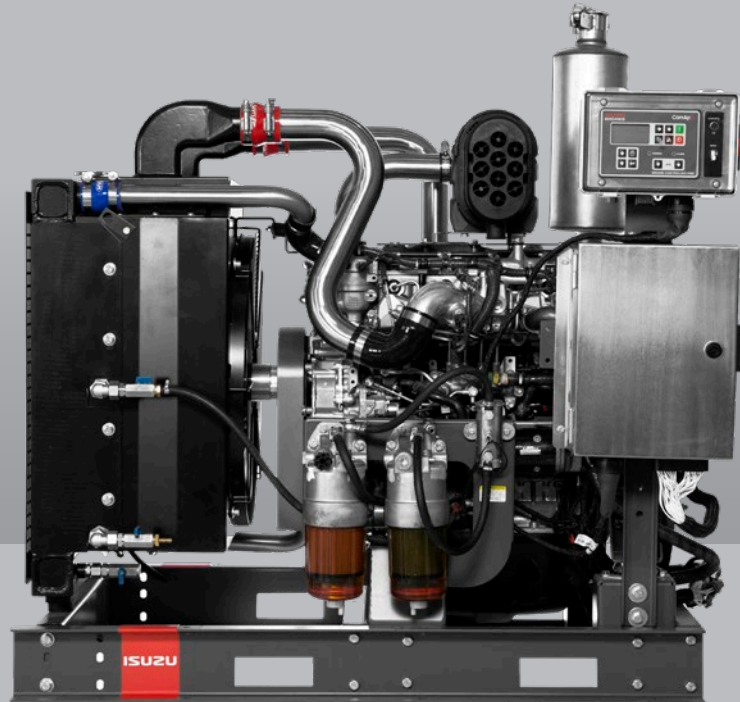

AT A GLANCE

Power Output ■ Max. 95.0 kW / 127.4 hp (rated) @ 2500 RPM
■ Max. 80.8 kW / 108.3 hp (cont.) @ 2500 RPM

Torque Output ■ Max. 408 Nm @ 2000 RPM

Displacement ■ 3.0 L

Bore x Stroke ■ 95.4 x 104.9 mm

O/A Dimensions (engine only) ■ 977 mm (L)
■ 739 mm (W)
■ 842 mm (H)

Dry Weight (engine only) ■ 320 kg

Features

- Turbocharged intercooled diesel engine
- Common rail direct injection fuel system
- Low noise, low fuel consumption, low maintenance
- Easy to start
- Reliable power
- Water cooled
- Tier-3 emission spec. reference
- Genuine Isuzu engine manufactured in Japan

ENGINE PERFORMANCE

Engine Power	RPM	1000	1200	1400	1600	1800	2000	2200	2400	2500
Rated (kW / hp)		28.0 / 37.5	39.0 / 52.3	51.0 / 68.4	63.0 / 84.5	76.0 / 101.9	85.5 / 114.7	92.0 / 123.4	94.0 / 126.1	95.0 / 127.4
Continuous (kW / hp)		23.8 / 31.9	33.2 / 44.5	43.4 / 58.1	53.6 / 71.8	64.6 / 86.6	72.7 / 97.5	78.2 / 104.9	79.9 / 107.1	80.8 / 108.3

SPECIFICATIONS

ENGINE

Type:	Vertical water-cooled 4-cycle Diesel
Model (Manufacturer):	4JJ1-XYBW01 (Isuzu)
Emission Spec. Reference:	Tier-3 / Stage-IIIA
Max. Rated Output:	95.0 kW (127.4 hp) @ 2500 RPM
Continuous Output:	80.8 kW (108.3 hp) @ 2500 RPM
Max. Torque	408 Nm @ 2000 RPM
Displacement:	3.0 L
Combustion System:	Direct Injection (Turbocharged Intercooled)
O/A Dimensions:	977 (L) x 739 (W) x 842 mm (H)
Dry Weight:	320 kg
Fuel Consumption:	23.6* L/h @ 100% load

*Based on diesel fuel with a specific gravity of 0.835 kg/m³ at 15°C. Actual value may vary.

POWER UNIT CONFIGURATIONS

- 1. Starter (STR)**
 - Light duty air cleaner system
 - Industrial grade exhaust system
 - Engine mounting feet
 - Heavy duty full aluminium cooling system (max. 45°C)
 - 12V complete electrical system (incl. engine harness and stop solenoid)
- 2. Premium (PRM) Features include STR plus:**
 - Heavy duty air cleaner system (dual element)
 - Air cleaner restriction indicator
 - Residential grade exhaust system
 - Skid rail chassis mounting
 - High performance heavy duty cooling system (50°C +)
 - IP65 'PRO' engine controller (advanced watchdog protection + application I/O)
 - Remote oil drain kit

KEY BENEFITS

DESIGN

Australian designed and sourced engine mounts and skid
 Australian designed heavy duty bar and plate all aluminium radiator
 Premium quality air cleaners
 Complete electrical engine harness (includes engine stop solenoid, glow plug assisted start, fuel feed pump)
 IP65 stainless steel ECM enclosure with LED indicators

CONTROL PANEL

ComAp 'PRO' professional engine controller
 (advanced engine monitoring protection, plus customer application inputs/outputs, complete event history log, large easy to read display)




ComAp 'PRO' Controller

OPTIONS

Flywheel stub shafts
 Auxiliary PTO clutch
 Extension skid for mounting of auxiliary items
 Premium pump pressure transducer range
 4G remote monitoring and control kit
 Low coolant alarm protection kit
 160W solar battery charging kit
 Extension harnesses
 Coolant surge tank kit
 Vibration isolation mounts



Transducer option



Solar panel option



Clutch option