

### Generator set data sheet

**Model:** C44 D5L (B3.3)  
**Frequency:** 50 Hz  
**Fuel type:** Diesel

|                                 |           |
|---------------------------------|-----------|
| <b>Spec sheet:</b>              | S-6282-EN |
| <b>Noise data sheet (open):</b> | MSP-3031  |
| <b>Airflow data sheet:</b>      | MCP-2027  |

| Fuel consumption | Standby  |     |     |      | Prime    |     |     |      |
|------------------|----------|-----|-----|------|----------|-----|-----|------|
|                  | kVA (kW) |     |     |      | kVA (kW) |     |     |      |
| Ratings          | 44 (35)  |     |     |      | 40 (32)  |     |     |      |
| Load             | 1/4      | 1/2 | 3/4 | Full | 1/4      | 1/2 | 3/4 | Full |
| US gph           | 1.0      | 1.4 | 2.2 | 2.6  | 1.0      | 1.3 | 2.1 | 2.6  |
| L/hr             | 3.9      | 5.4 | 8.4 | 9.9  | 3.8      | 5.1 | 8.0 | 9.7  |

| Engine                         | Standby rating                | Prime rating |
|--------------------------------|-------------------------------|--------------|
| Engine manufacturer            | Cummins                       |              |
| Engine model                   | 4BTAA3.3-G13                  |              |
| Configuration                  | Inline, 4-Cylinder Diesel     |              |
| Aspiration                     | Turbocharged and after-cooled |              |
| Gross engine power output, kWm | 62.6                          | 58           |
| BMEP at set rated load, kPa    | 1538                          | 1428         |
| Bore, mm                       | 95                            |              |
| Stroke, mm                     | 115                           |              |
| Rated speed, rpm               | 1500                          |              |
| Piston speed, m/s              | 5.75                          |              |
| Compression ratio              | 19:1                          |              |
| Lube oil capacity, L           | 8                             |              |
| Overspeed limit, rpm           | 1650                          |              |
| Regenerative power, kW         | N.A.                          |              |
| Governor type                  | Mechanical as standard        |              |
| Starting voltage               | 12V DC                        |              |

| Fuel flow  |       |
|--|-------|
| Maximum fuel flow, L/hr                              | 45    |
| Maximum fuel inlet restriction, mm Hg (clean filter) | 101.6 |
| Maximum fuel inlet temperature, °C                   | 70    |

| <b>Air</b>   | <b>Standby Rating</b> | <b>Prime Rating</b> |               |
|--|-----------------------|---------------------|---------------|
| Combustion air, m <sup>3</sup> /min                                    | 4.64                  | 4.19                |               |
| Maximum air cleaner restriction, kPa                                   | 2.5                   |                     |               |
| <b>Exhaust</b>   |                       |                     |               |
| Exhaust gas flow at set rated load, m <sup>3</sup> /min                | 10.64                 | 9.76                |               |
| Exhaust gas temperature, °C  | 491                   | 483                 |               |
| Maximum exhaust back pressure, kPa                                     | 10                    |                     |               |
| <b>Standard set-mounted radiator cooling</b>                           |                       |                     |               |
| Ambient design, °C @ 12.7mm H <sub>2</sub> O                           | 55                    |                     |               |
| Fan load, KW <sub>m</sub>  | 2 +/- 1               |                     |               |
| Coolant capacity (with radiator), L                                    | 10.3                  |                     |               |
| Cooling system air flow, m <sup>3</sup> /sec @ 12.7mm H <sub>2</sub> O | 1.611                 |                     |               |
| Total heat rejection, BTU/min  | 1744                  | 1560                |               |
| Maximum cooling air flow static restriction mm H <sub>2</sub> O        | 25.4                  |                     |               |
| <b>Weights*</b>  |                       |                     |               |
|  | <b>Open</b>           | <b>Enclosed</b>     |               |
| Unit dry weight kg (Standard skid)                                     | 922                   | 1236                |               |
| Unit wet weight kg (Standard skid)                                     | 1010                  | 1414                |               |
| Unit dry weight kg (Optional skid)                                     | 1140                  | 1543                |               |
| Unit wet weight kg (Optional skid)                                     | 1228                  | 1631                |               |
| <b>Dimensions</b>  |                       |                     |               |
|  | <b>Length</b>         | <b>Width</b>        | <b>Height</b> |
| Open set dimensions (Standard skid)                                    | 2050                  | 967                 | 1510          |
| Enclosed set dimensions (Standard skid)                                | 2270                  | 975                 | 1920          |
| Open set dimensions (Optional skid)                                    | 2270                  | 967                 | 1720          |
| Enclosed set dimensions (Optional skid)                                | 2270                  | 975                 | 2115          |

**See your distributor for more information.**

Cummins Power Generation  
 Manston Park, Columbus Avenue  
 Manston, Ramsgate  
 Kent CT12 5BF, UK  
 Telephone: +44 (0) 1843 255000  
 Fax +44 (0) 1843 255902  
 E-mail: [cpg.uk@cummins.com](mailto:cpg.uk@cummins.com)  
 Web: [www.cumminspower.com](http://www.cumminspower.com)




[power.cummins.com](http://power.cummins.com)

**Our energy working for you.™**


©2016 Cummins Power Generation Inc. All rights reserved.  
 Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand, AmpSentry, InPower and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product, or service names may be trademarks or service marks of others. Specifications are subject to change without notice.  
 D-6276-EN

## Genset outline

### Open set

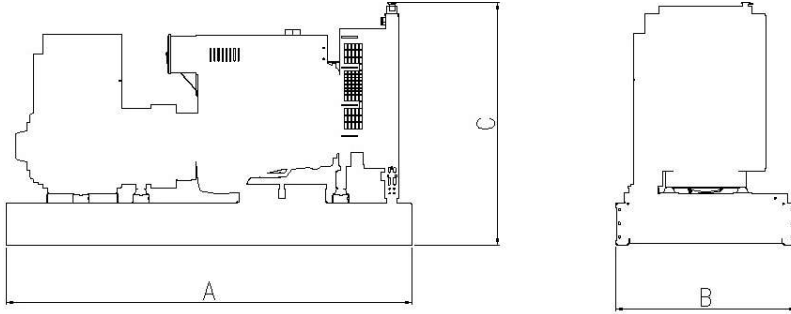

### Enclosed set

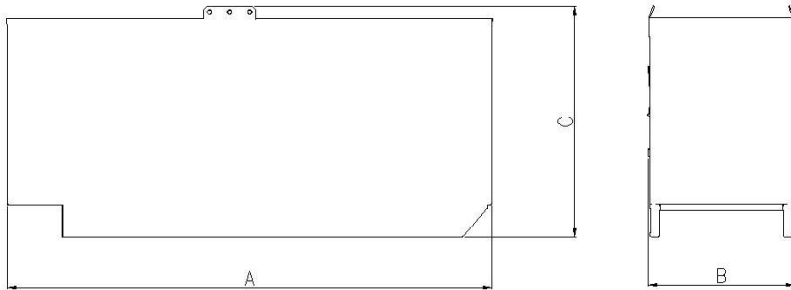

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

©2012 | Cummins Power Generation Inc. | All rights reserved | Specifications subject to change without notice | Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product, or service names may be trademarks or service marks of others. Document no. DS374-CPGK-RevA - 2/2/2012

### Alternator data

| Connection <sup>1</sup> | Temp rise °C | Duty <sup>2</sup> | Voltage Alternator |         |
|-------------------------|--------------|-------------------|--------------------|---------|
| Wye -3 phase            | 163/125      | S/P               | UC122 4C           | 380-415 |
| Wye -3 phase            | 150/105      | S/P               | UC122 4D           | 380-415 |
|                         |              |                   |                    |         |
|                         |              |                   |                    |         |
|                         |              |                   |                    |         |
|                         |              |                   |                    |         |

### Ratings definitions

| Emergency Standby Power (ESP) | Limited-Time running Power (LTP): | Prime Power (PRP) | Base Load (Continuous) Power (COP) |
|-------------------------------|-----------------------------------|-------------------|------------------------------------|
|-------------------------------|-----------------------------------|-------------------|------------------------------------|

### See your distributor for more information.

Cummins Power Generation  
 Manston Park, Columbus Avenue  
 Manston, Ramsgate  
 Kent CT12 5BF, UK  
 Telephone: +44 (0) 1843 255000  
 Fax +44 (0) 1843 255902  
 E-mail: [cpg.uk@cummins.com](mailto:cpg.uk@cummins.com)  
 Web: [www.cumminspower.com](http://www.cumminspower.com)



[power.cummins.com](http://power.cummins.com)

### Our energy working for you.™

©2016 Cummins Power Generation Inc. All rights reserved.  
 Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand, AmpSentry, InPower and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product, or service names may be trademarks or service marks of others. Specifications are subject to change without notice.  
 D-6276-EN

|   |  |  |  |
|---|--|--|--|
| Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789 and DIN 6271. | Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528. | Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789 and DIN 6271. | Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789 and DIN 6271. |
|---|--|--|--|

## Formulas for calculating full load currents:

### Single phase output

$$\frac{kW \times \text{SinglePhase Factor} \times 1000}{\text{Voltage}}$$

### Three phase output

$$\frac{kW \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

### See your distributor for more information.

Cummins Power Generation  
 Manston Park, Columbus Avenue  
 Manston, Ramsgate  
 Kent CT12 5BF, UK  
 Telephone: +44 (0) 1843 255000  
 Fax +44 (0) 1843 255902  
 E-mail: [cpg.uk@cummins.com](mailto:cpg.uk@cummins.com)  
 Web: [www.cumminspower.com](http://www.cumminspower.com)



[power.cummins.com](http://power.cummins.com)

### Our energy working for you.™

©2016 Cummins Power Generation Inc. All rights reserved.  
 Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand, AmpSentry, InPower and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product, or service names may be trademarks or service marks of others. Specifications are subject to change without notice.  
 D-6276-EN