


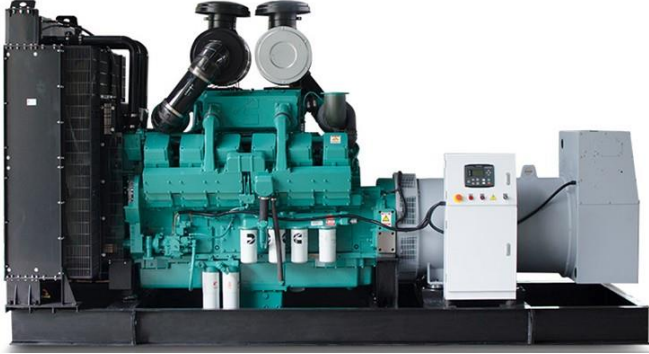

TECHNICAL OVERVIEW

MODEL	GC750
PRIME POWER	750 kVA / 600 kW
STANDBY POWER	775 kVA / 620 kW
FUEL TYPE	DIESEL
SPEED	1500 RPM
TYPE	HEAVY DUTY
FREQUENCY	50Hz
PHASE/VOLTAGE	THREE PHASE / 415V

ENGINE

MANUFACTURER	CUMMINS
ENGINE MODEL	KTA38G2
CYLINDER/ CAPACITY	12 CYL / 38 LTR
INDUCTION	TURBO AFTER COOLED
FUEL CONSUMPTION	167 L/HR @ 100% LOAD 128 L/HR @ 75% LOAD 90 L/HR @ 50% LOAD
GOVERNOR	ELECTRONIC
OIL CAPACITY	135 LTR
COOLANT CAPACITY	105 LTR

FEATURES

HIGH AMBIENT COOLING PACKAGE
BATTERY CHARGER AND ISOLATOR
HEAVY DUTY SKID BASE

CONTROLS

BRAND AND MODEL	DEESEA DSE7420 MKII
CIRCUIT BREAKER	FOUR POLE

ALTERNATOR

BRAND AND MODEL	STAMFORD LV634B
TYPE	BRUSHLESS / AVR
HARMONIC DISTORTION	LESS THAN 5%
INSULATION CLASS	CLASS H

OPTIONS

JACKET WATER AND ANTI-CONDENSATION HEATERS
SYNCHRONISING CONTROLLER OPTIONS
AUTO TRANSFER SWITCHES (ATS)

DIMENSIONS

LENGTH / WIDTH / HEIGHT	493 CM/ 173 CM / 242.5 CM
WEIGHT (DRY)	6527 KG

PRIME POWER (PRP): Continuous operation at variable load unlimited hours per year, with an average load factor of 75%. 10% overload capability is 1 hour in a 12 hour period of operation.

STANDBY POWER RATING (ESP): Emergency power supply with an average load factor of 85%. No overload capability. Limited to 400 hours per year.

