
KUBOTA Z482-BG 1500

INDUSTRIAL DIESEL ENGINE

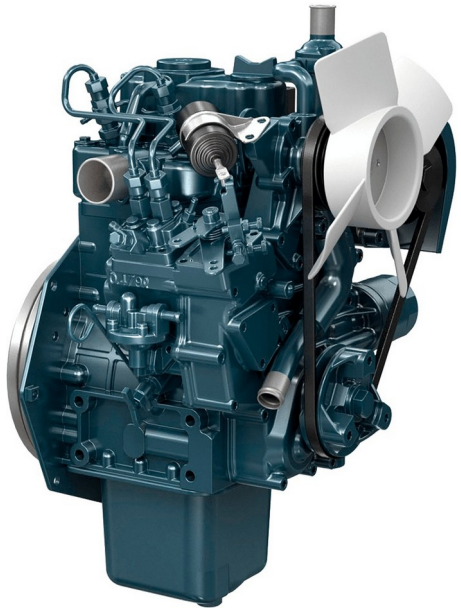

The Kubota Z482-BG 1500 is a 479 cm^3 diesel engine with two cylinders. It delivers 3.4 kW of net intermittent power at 1,500 rpm.

MODEL OVERVIEW	
MODEL	Z482-BG 1500
DISPLACEMENT	479 cm^3
FUEL	Diesel
CYLINDERS	2

ENGINE OUTPUT	
NET INTERMITTENT POWER	3.4 kW (4.6 hp)
NET RATED SPEED	1,500 rpm

ENGINE SPECIFICATIONS	
COOLING	Water Cooled
ORIENTATION	Vertical
STROKE	68 mm
COMBUSTION	E-TVCS Indirect Injection
INTAKE	Naturally Aspirated
STARTING	Electric
SPEED TYPE	Fixed

ENGINE FEATURES
Compact dimensions suit installations with limited space.
E-TVCS combustion supports fuel economy and starting performance.
Coated pistons and a half-floating valve cover reduce noise.
The Super Glow system shortens cold-start preheating.

Kubota

Materials and specifications are subject to change. Specification sheet current as of 19/11/2026.