



# Genette

## GC60-1

**Model** GC60  
**Speed** 1500 RPM  
**Phase/Voltage** 1, 240  
**Frequency** 50 Hz

**Stdby Power** 66kVA / 52.7 kW  
**Prime Output** 60kVA / 48 kW  
**Noise Level (dBA @ 7m)** 69 dB(A)  
**Fuel Capacity** 226 Litres

**Length** 1.842m  
**Width** 0.8m  
**Height** 1.47m  
**Weight** 919 kg

### Engine

**Manufacturer** Cummins Diesel  
**Engine Model** 4BTA3.9G2  
**Type & Cylinder** 4 Stroke – 6 L  
**Induction** Turbocharged After Cooled  
**Fuel Consumption**  
13.1L @ 100%, 9.8L @ 75%, 6.7L @ 50% Load  
**Coolant Capacity** 8 L  
**Governor** Electronic  
**Cubic Capacity** 3.9 L  
**Oil Capacity** 11 L

### Outlets


**Outlets** Single Phase  
**PMG** EBS option

### Controls

**Controller** DeepSea 702 with Analog Metering  
**Circuit Breaker** Four Pole  
**Emergency Stop** Included

### Alternator

**Alternator Brand / Model** Stamford / UCi274C  
**Type** Brushless  
**Harmonic Distortion** Less than 5%  
**Protection Class** IP 23  
**Insulation Class** Class H

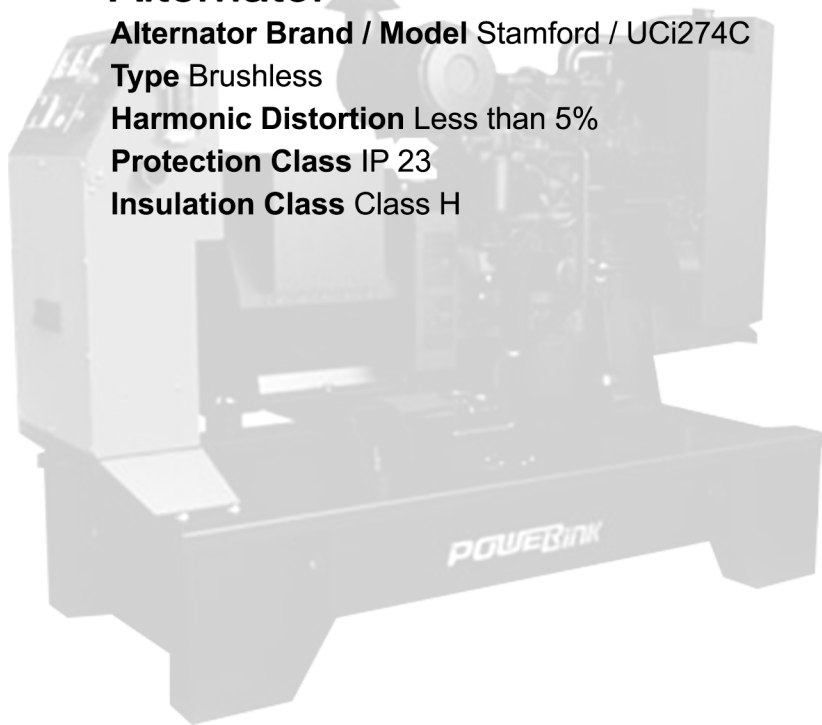

East Coast Head Office Ph. 1300 305 912  
Ph. +61 7 3277 8626 Fax. +61 7 3277 8627  
24 Perrin Place, Salisbury QLD 4107

West Coast Head Office Ph. 1300 305 912  
Ph. +61 8 6305 0145 Fax. +61 8 6305 0219  
2/6 Quantum Link, Wangara WA 6065

**CALL US**  
**1300 305 912**