


# GH16,000E-FBT Construction Series

# Genelite GH16,000E-FBT CS

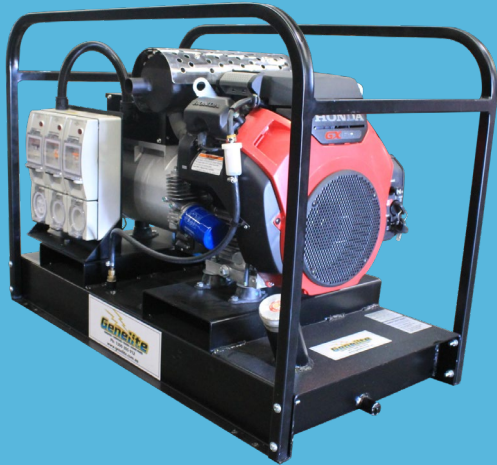

**PORTABLE POWER**

POWERED by  
**HONDA**™

**mecc alte spa**

## Technical

|                               |                                   |
|-------------------------------|-----------------------------------|
| <b>Model</b>                  | GH16,000E-FBT Construction Series |
| <b>Type</b>                   | Portable                          |
| <b>Speed</b>                  | 3000 RPM                          |
| <b>Phase/Voltage</b>          | 3/415, 1/240                      |
| <b>Frequency</b>              | 50 Hz                             |
| <b>Max power kW @ 0.8pf</b>   | 13kW                              |
| <b>Continuous Output</b>      | 16kVA                             |
| <b>Noise Level (dBA @ 7m)</b> | 74                                |
| <b>Frame</b>                  | Skid Base with Roll Over Frame    |

## Engine

|                         |                     |
|-------------------------|---------------------|
| <b>Manufacturer</b>     | Honda               |
| <b>Engine Model</b>     | GX690E              |
| <b>Type</b>             | O.H.V.              |
| <b>Starting</b>         | Electric Start      |
| <b>Fuel</b>             | Unleaded Petrol     |
| <b>Run Time</b>         | 11 hrs @60%         |
| <b>Tank Capacity</b>    | 50 L                |
| <b>HP 3000 rpm cont</b> | 14.1 HP             |
| <b>Cubic Capacity</b>   | 688 cm <sup>3</sup> |
| <b>Oil Capacity</b>     | 1.9 L               |

## Alternator

|                            |              |
|----------------------------|--------------|
| <b>Alternator Brand</b>    | Mecc Alte    |
| <b>Type</b>                | Brushless    |
| <b>Harmonic Distortion</b> | Less than 5% |
| <b>Protection Class</b>    | IP 23        |
| <b>Insulation Class</b>    | Class H      |

## Outlets

|                |   |
|----------------|---|
| <b>Outlets</b> | 1 x 32amp 3 Phase IP66 RCD Protected<br>2 x 15amp Single Phase IP66 RCD Protected |
|----------------|---|

## Dimensions & Weight

|               |        |
|---------------|--------|
| <b>Length</b> | 105 cm |
| <b>Width</b>  | 55 cm  |
| <b>Height</b> | 70 cm  |
| <b>Weight</b> | 150 kg |

## Options

|                   |                        |
|-------------------|------------------------|
| <b>Outlets</b>    | Weather Protected IP66 |
| <b>Wheel kits</b> | Four Wheel             |