


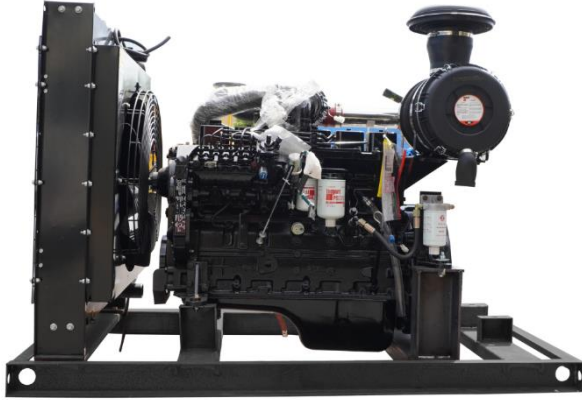

TECHNICAL OVERVIEW

MODEL	4BTA3.9PP
RATING	125 HP (93 kW)
SPEED	2200 RPM
TORQUE	475 N-m @ 1500 RPM
FUEL TYPE	DIESEL
TYPE	HEAVY DUTY INDUSTRIAL
ADAPTION	SAE 3 / 11.5"

ENGINE

MANUFACTURER	CUMMINS
ENGINE MODEL	4BTA3.9
CYLINDER/ CAPACITY	4 CYL / 3.9 LTR
INDUCTION	TURBOCHARGED
OIL CAPACITY	10.9 LTR
COOLANT CAPACITY	20.8 LTR


FEATURES

TRANSPORT SKID BASE
HIGH AMBIENT COOLING PACKAGE
HEAVY DUTY AIR CLEANER


OPTIONS

HEAVY DUTY SKID BASE
INSTRUMENT PANEL
THROTTLE OPTIONS


PERFORMANCE CURVE

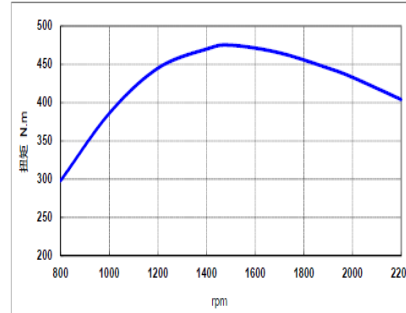

Torque Output	
rpm	N.m
800	298
1000	386
1200	445
1400	470
1500	475
1700	465
1900	445
2000	433
2200	404

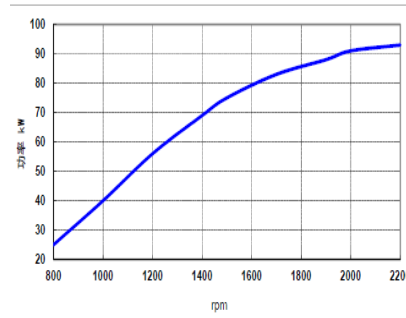

Power Output	
rpm	kW
800	25
1000	40
1200	56
1400	69
1500	75
1700	83
1900	88
2000	91
2200	93

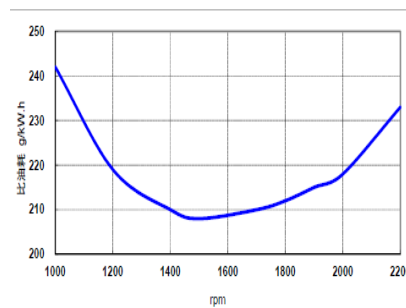

Fuel Consumption	
rpm	g/kW.h
1000	242
1200	219
1400	210
1500	208
1700	210
1800	212
1900	215
2000	218
2200	233

DIMENSIONS

LENGTH / WIDTH / HEIGHT	120 CM / 58 CM / 105 CM
WEIGHT (DRY)	360 KG